

# Clearing a Staple Jam of the Folding Unit (4,000-sheet Finisher)


#### Open the finisher front cover 1 and 2.

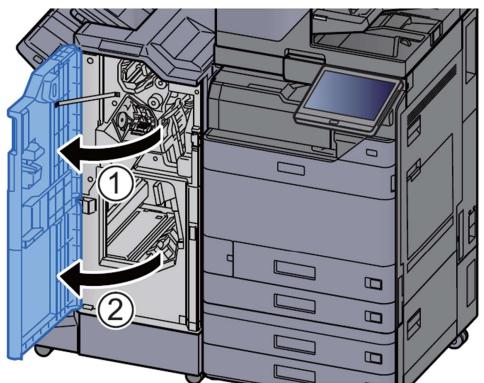


### Remove paper from inside the finisher.

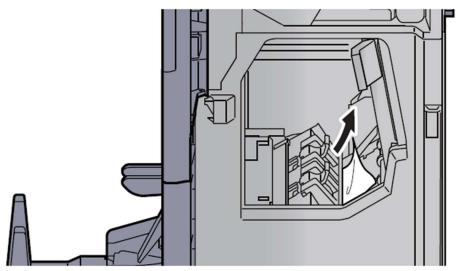


### Remove the Staple Cartridge Holder (B) or (C).

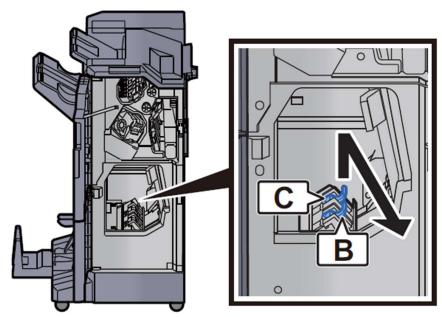


#### Remove the jammed staple.

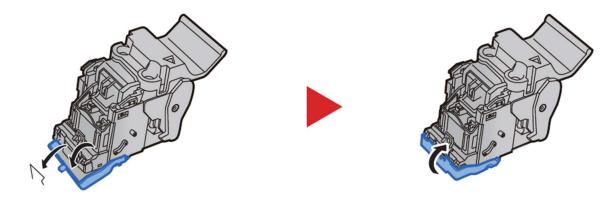


### Install the Staple Cartridge Holder (B) or (C).

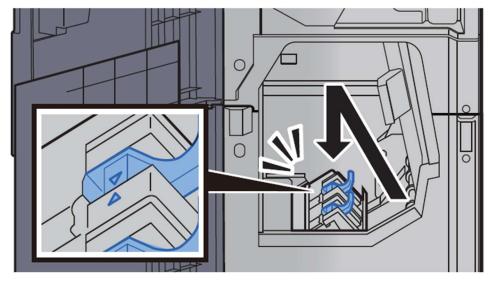


6 Return the covers to the original position.

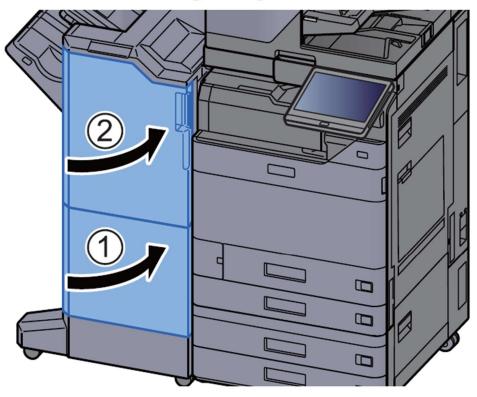


7 Lift the folding tray.




**8** Remove any jammed paper.




Press the release lever to pull the folding unit out.

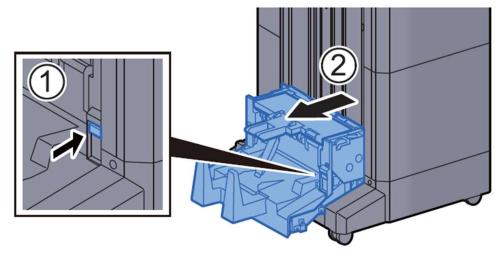


10 Open the folding unit left cover.

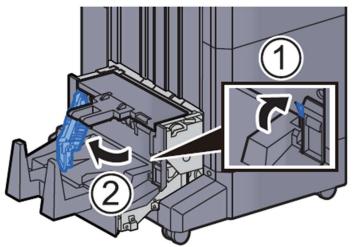


**11** Turn dial (**D**9).

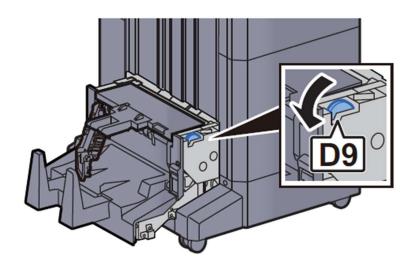


# 12 Remove any jammed paper.

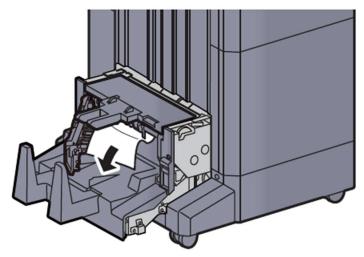


## 13 Return the folding unit left cover to the original position.




## 14 Open the folding unit top cover.

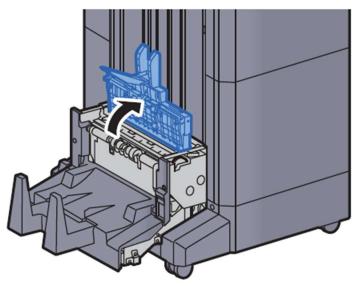


# **15** Turn dial (D9).

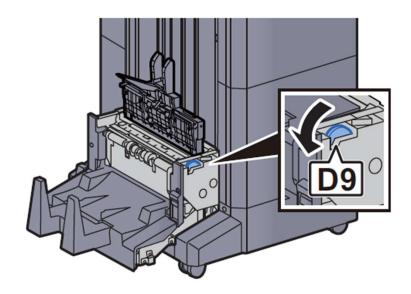

# 16 Remove any jammed paper.

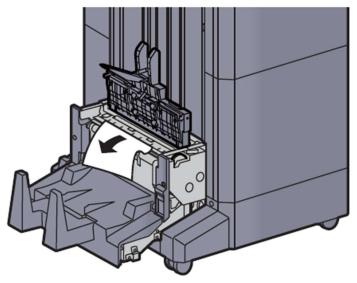

### 17 Return the folding unit top cover to the original position.



# 18 Return the folding unit to the original position.

